

QMA401

Trace Moisture Analyzer

The next generation Advanced Quartz Crystal Microbalance analyzer from Michell Instruments is designed to provide reliable, fast and accurate measurement of trace moisture content in a variety of applications where keeping moisture to a minimum is of critical importance.



Highlights

- Precision measurement from 0.1 to 2000 ppm_v
- Simple, low cost, on-site maintenance
- Accuracy of 0.1ppm_v or 10% of reading, whichever is greater
- Reliable measurement even in varying sample conditions — analyzer corrects automatically for sample pressure and flow variations
- Unaffected by changes in background gas composition
- Long intervals between maintenance
- Dryer can be replaced by the user in 10 minutes
- Intuitive user interface
- Ethernet or USB digital communications
- SD card datalogging
- Optional internal sample handling and bypass loop

Applications

- High purity gas production
- Air separation plants
- Semiconductor CVD chamber cleaning
- Semiconductor etching chambers
- H₂ coolant for generators
- Polymer chip drying



Air Separation Plant

Introducing the QMA401 Trace Moisture Analyzer

Precision Measurement

The QMA401 is the result of Michell Instruments' continuous improvement of Quartz Crystal Microbalance technology. The analyzer utilizes a new generation of precision crystal oscillators, guaranteeing high accuracy moisture measurements which are completely insensitive to changes in background gas composition.

While measurements at quantities of moisture <math><1\text{ppm}_v</math> stretch the capabilities of other technologies, the new QMA401 offers reliability, simplicity and greatly reduced cost of ownership from the industry-proven Quartz Crystal technology.


Reliability

For maximum stability, all critical components of the QMA401 — the moisture generator, sensor and flow control devices — are precisely temperature controlled. This ensures that fluctuations in sample gas or environmental temperature have no influence on the measurement.

The analyzer utilizes a mass flow controller to ensure precise control of the sample and reference gas flows to $\pm 0.1\text{ml}/\text{min}$. Coupled with a pressure transducer, this system ensures continued accuracy of measured and calculated parameters even during fluctuations in sample pressure.

Simplicity

The QMA401 provides a highly intuitive, color, touch-screen interface. This powerful UI makes control, logging and configuration of analyzer parameters very simple. Both real-time trend graphing and alarm indication are immediately visible on the main display.

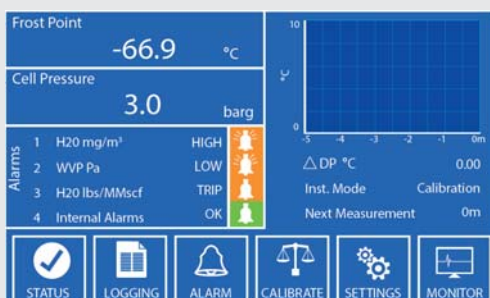

Minimal & Straightforward Maintenance

Sophisticated analyzers are often complicated and require experience and special care in use and maintenance, increasing cost of ownership.

The QMA401 differs through its straightforward approach to field service, which can be carried out in-situ. The desiccant dryer is easy to replace via the 'quick release' service panel on the rear of the analyzer. The moisture generator has an average lifespan of 3 years before replacement is required, therefore the unit can perform reliably for many years with just basic maintenance and housekeeping.

Integrated Sample Handling

The analyzer can be specified with an integral sample handling system, including a pressure regulator and 'fast loop' bypass, to ensure quick transit of the sample from the point of interest to the sensor.

Use Your Preferred Communication Media

For greater flexibility, the QMA401 offers:


- Modbus over USB and Ethernet
- Datalogging to SD card
- 2 user-configurable analog outputs
- Status and process alarms

Automatic Verification

The QMA401 incorporates an automatic verification system that uses either the internal traceable moisture generator or an external reference supplied by the user. Carried out on the sample gas flow, these periodic validation-checks of sensor performance can be initiated on demand, or automatically (at user-defined intervals and time of day), providing a verification of analyzer performance and automatically adjusting out any change. The moisture generator at the core of the system is supplied with a calibration traceable to NPL and NIST.


Technology: Quartz Crystal Microbalance

The Quartz Crystal Microbalance (QCM) technology for moisture measurement is based on monitoring the frequency modulation of a hygroscopic-coated quartz crystal with specific sensitivity to water vapor.

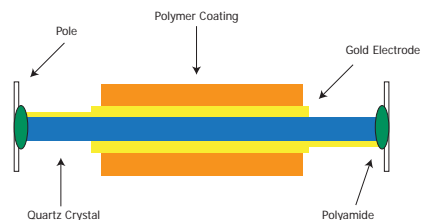

Bulk adsorption of water vapor onto the coated crystal causes an increase in the crystal's effective mass, modifying its oscillation frequency in a very precise and repeatable manner. The frequency change is in direct proportion to the water vapor pressure in the sample gas, providing a direct measurement of moisture content.

The sorption process is fully reversible with no long-term drift effect, giving a highly reliable and repeatable measurement.

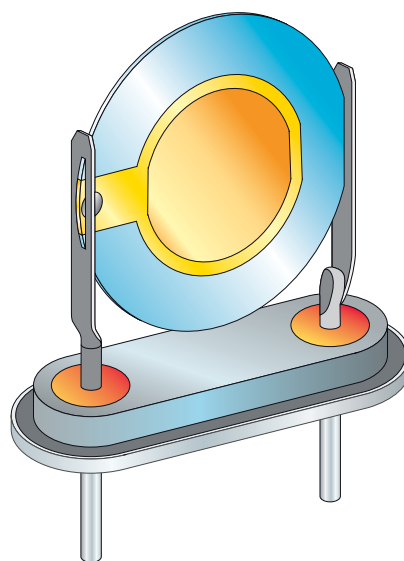


Technical Specifications

Performance	
Measurement technology	Fast Response Quartz Crystal Microbalance
Measurement range	0.1 to 2000 ppm _v
Accuracy	±10% of reading from 1 to 2000 ppm _v 0.1 ppm _v between 0.1 and 1 ppm _v
Repeatability	±5% of reading from 1 to 2000 ppm _v ±0.1 ppm _v between 0.1 and 1 ppm _v
Available units	ppm _v , ppm _w , mg/nm ³ , vapor pressure (Pa), frost point (°C), lb/MMscf
Response speed	T63 <2 mins to step change in either direction T95 <5 mins to step change in either direction
Sensitivity	0.1 ppm _v or 1% of reading, whichever is greater
Automatic calibration	Internal moisture generator source calibrated traceable to NPL and NIST
Monitor	
HMI	7" color LCD with touch screen
Analog outputs	2 channels: user selectable 4–20 mA or 1 to 5 V
Digital communications	USB and Modbus TCP over Ethernet
Data logging	Direct logging to SD card or PC via application software
Alarms	1 x System alarm, volt-free change-over (FORM C) 1 x Flow alarm, volt-free change-over (FORM C) settable high or low 2 x Level alarm, for ppm _v or DP, settable to be active high or low
Power supply	85 to 264 V AC, 47/63Hz

Operating Conditions	
Inlet pressure	1 barg
Outlet pressure	Atmospheric
Sample flow requirement	300ml/min total flow @ atmospheric pressure
Sample gas temperature	0 to +100°C
Operating environment	+5 to +45°C up to 90% RH
Mechanical Specifications	
Case	19" x 4U x 434mm Housing
Sample connections	1/4" VCR Swagelok®
Weight	13.5kg

Dimensions

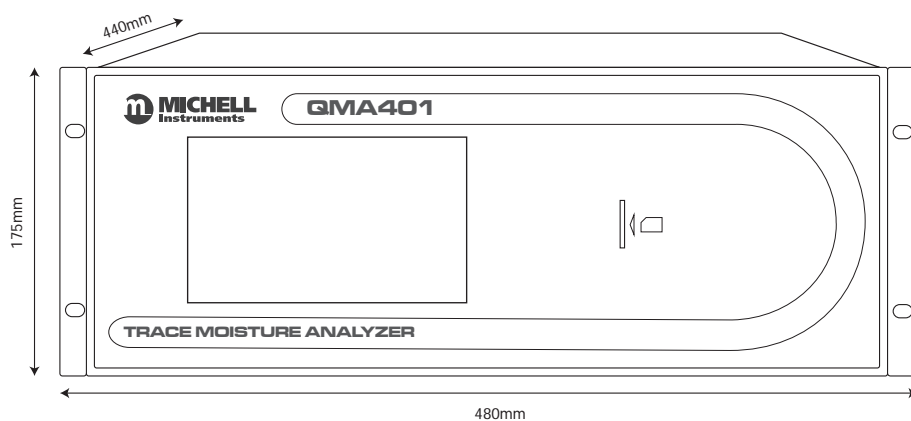

Michell Instruments Ltd 48 Lancaster Way Business Park, Ely, Cambridgeshire, CB6 3NW
 Tel: +44 (0) 1353 658000, Fax: +44 (0) 1353 658199, Email: uk.info@michell.com, Web: www.michell.com/uk

Michell Instruments adopts a continuous development programme which sometimes necessitates specification changes without notice.
 Issue no: QMA401_97480_V1_UK_Datasheet_0715